



# bollards

## halo bollard

### main features

Innovative circular stem gives all round flexibility. Available in 270mm and 420mm signface dimensions. Slimline profile gives a maximum visibility to motorists of pedestrians.

All signfaces and panels are an integral part of the rotational moulding, up to 40% of the nominal wall thickness. This gives a long fade free life and prevents removal by scratching or solvents - such as graffiti removers.

Single fixing point to allow for orientation of the signface at any point and to simplify attachment/detachment of the bodyshell.

The bodyshell can be retro-fitted onto an existing Haldo Basebox with the use of a Halo Light Tray and Lid.



### All round flexibility



### Single fixing point



HALDO



# bollards

## halo bollard shells

### specification

#### head & stem

Rotationally moulded U.V. stabilised polymers. The head and stem joint is a unique patented bond. Signfaces and stem are integrally moulded.

Dimensions - see fig. 1 & fig. 1a



#### head & stem part numbers

C6/HAL270/11 270mm single aspect c/w fixing band

C6/HAL420/11 420mm single aspect c/w fixing band

C6/HAL270/12 270mm double aspect c/w fixing band

C6/HAL420/12 420mm double aspect c/w fixing band

To order select the DTp diagram number for the signface from the range below and specify in brackets after the part number e.g:

C6/HAL270/11 (610L)

Halo bodyshell single aspect with keep left arrow.

fig. 1

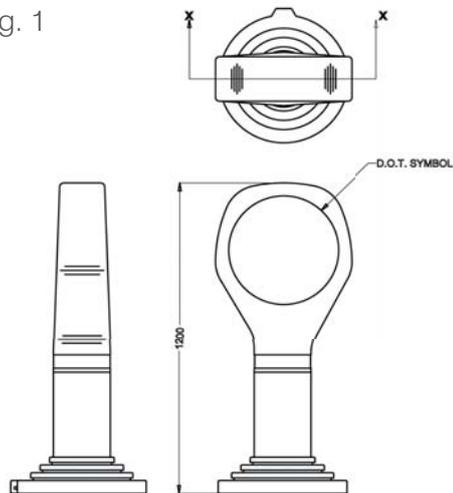


fig. 1a

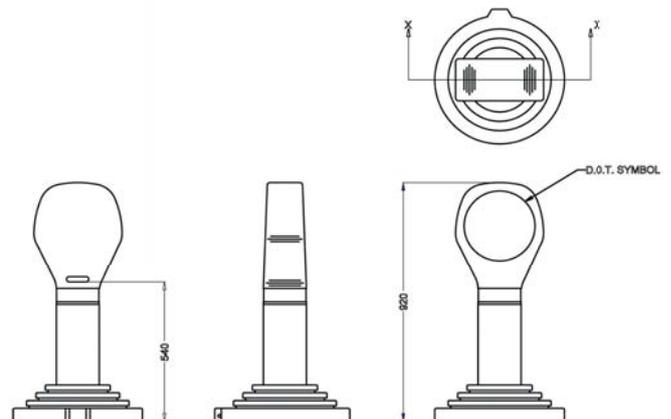


fig. 2



HALDO



### Haldo Developments Limited

Western Way Bury St. Edmunds Suffolk IP33 3SP UK

T. +44 (0)1284 754043 F. +44 (0)1284 767260

info@haldo.com

www.haldo.com

Haldo Developments Ltd is a co.  
registered in England and Wales

Reg no.940159

VAT No. GB 102 351627