



Base Boxes & Light Trays

Base Lights and Gear Trays or Illuminated Traffic Bollards

Features:

The Haldo Base box is manufactured in one size from die cast aluminium alloy LM6 and features Base flanges include holes for fixing with rag bolts if required.

There are both a lead in tube and a gland fit option. Cable entry is through the rear of basebox sealed by heat shrink sleeves, cold shrink sleeves, cable entry seal, or cold pour compounds. Gland fitting options or cable entry aperture.

The lid is fixed with four stainless steel bolts or is available as a quick release lid option with 2 tri head bolt fixing. The Haldo base box achieves an IP67 rating.

All industry standard Traffic Bollard shells can be fitted to the Haldo Base Light. Lids, light trays and bodyshells are interchangeable according to each application.



AVAILABLE TO
BUY ONLINE

Options:

- Die Cast LM6 Base Box
- Cable Entry or Gland Fit Available
- Lid with 4 Bolts or Quick Release
- Fits All Industry Standard Illuminated Bollard Shells
- With Or Without photocell
- LED or Fluorescent Light Source available
- Replacement Components Available
- IP68 LED Light Tray
- IP67 Base Box
- Flood Resistant LED trays and Bases



Haldo | 221 Bowling Back Lane | Bradford | West Yorkshire | BD4 8SJ
www.haldo.com | 01284 754043 | sales@haldo.com





Base Boxes & Light Trays

Base Lights & Gear Trays

Led Light Trays:


The light tray has been designed with flooding in mind, the LED light tray itself is IP68 rated it has an integral domed lens, which is sealed to **IP68** which is then housed in the existing **IP67** sealed basebox for excellent flood resistance.

Light output conforms to **BS EN: 12899**, and the LED light tray consumes 17 watts of power. UMSUG Code 40 0017 0000 100.

The light tray is designed to illuminate any 270 or 600 type bollards and the Halo 270 bollard.

Order Codes and Descriptions:

Code	Description
C2/BL2/19LED	LED Baselight standard Lead in tube
C2/BL2/19A	2 x 8W Fluorescent Baselight
C2/BL2/19C	2 x 11W Fluorescent Baselight
C2/BL2/19D	3 x 11W Fluorescent Baselight
C2/BL2/16LED	LED Light Tray
C2/BL2/16A	2 x 8W Fluorescent Light Tray
C2/BL2/16C	2 x 11W Fluorescent Light Tray
C2/BL2/16D	3 x 11W Fluorescent Light Tray
C2/BL2/18-LG	Replacement lid WITHOUT Lens
C2/BL2/18-3	Replacement lid With 3MM Lens
C2/BL2/18-5	Replacement lid With 5mm Lens
C2/BL2/17	Base box with board, Earth cable, 3 way block & pin (for Fluorescent installs) and 4 lid bolts
C2/BL2/17A	Base box with board, Earth cable, and 4 lid bolts (for LED installs)

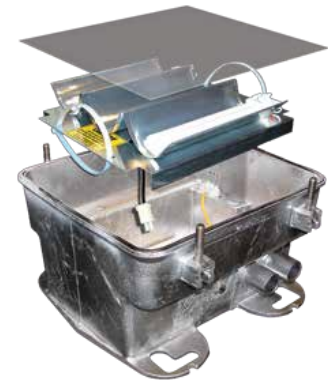

- o Add Suffix GF for Gland Fit
- o Add Suffix S for a Photocell
- o Add Suffix QR for Quick Release Lid

e.g. 2 x 11w Base Light with Quick Release lid, Gland Fit Cable entry and with a Photocell is C2/BL2/19D/GF/S/QR



AVAILABLE TO BUY ONLINE



Haldo | 221 Bowling Back Lane | Bradford | West Yorkshire | BD4 8SJ

www.haldo.com | 01284 754043 | sales@haldo.com

