




VARBERG

Strong & durable LED recessed luminaire

Background:

Recessed linear LED fitting, unique upstand recessing flange, suitable for new installations or retrofitting into existing cavities when Bergo, Bergen or Victor have been removed.

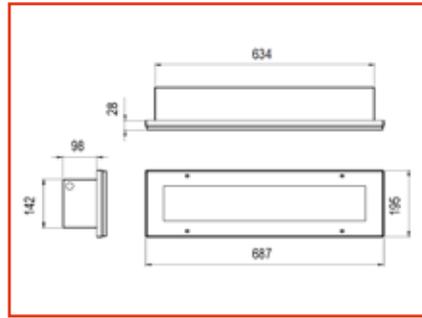

CCT: 4000K
Finish: Painted Textured Black*
IP: 65
IK: 18

Features:

- Body in Zinc coated steel.
- 3mm clear patterned polycarbonate flat panel diffuser secured by anti-tamper fixings.
- 2250 & 2450 lm are supplied set to ordered level but version for on-site switchable output is available – add suffix "ADJ".
- 4500 & 4900 lm are supplied set to ordered level but version for on-site switchable output is available – add suffix "ADJ".

* Other colours and technical modifications available.

Technical Data:

PRODUCT CODE	LUMENS	LENGTH (L)	LOAD
VAR/2/2250/4000	2250	687 (634)	18W
VAR/2/2450/4000	2450	687 (634)	20.5W
VAR/2/4500/4000	4500	687 (634)	35W
VAR/2/4900/4000	4900	687 (634)	39W

ENDURANCE
BY AETHER LIGHTING



AVAILABLE TO
BUY ONLINE



Haldo | 221 Bowling Back Lane | Bradford | West Yorkshire | BD4 8SJ
www.haldo.com | 01284 754043 | sales@haldo.com

